



Detex Corporation, 302 Detex Drive, New Braunfels, Texas 78130-3045  
830-629-2900 / 800-729-3839 / Fax 800-653-3839 / Text photos only: 830-481-6433 / INTERNET: www.detex.com

INSTALLATION INSTRUCTIONS FOR 03W ADVANTEX TRIM

DWG #: 100717


Table of Contents	Page
Device parts breakdown view & part numbers.....	2
Assemble Trim.....	2
Door Prep - Interior Door Face.....	3
Mark Cylinder Tailpiece Length.....	3
Trim Cylinder Tailpiece.....	4
Assemble Trim to Door.....	4

**TOOLS AND SUPPLIES**


- Safety Glasses
- (Always put on safety glasses prior to beginning installation of unit)**
- Pencil
- Center Punch
- Hammer
- Drill Motor
- Drill Bits & Taps
- Screw Driver (Phillips Drive)
- Tape Measure

For WARRANTY information,  
scan code below or  
go to [www.detex.com/warranty](http://www.detex.com/warranty)



For device installation videos,  
scan code below or  
go to [www.detex.com/videos](http://www.detex.com/videos)




ITEM	PART NO.	QTY	DESCRIPTION
1	101620-9	1	TRIM PLATE, 03W, BRUSHED STAINLESS STEEL FINISH (630)
2	ECL-445-X-X	1	CYLINDER, RIM, 5 PIN
	IC7R-X		CYLINDER, RIM, INTERCHANGEABLE, 7 PIN
3	100752-X	1	CYLINDER COLLAR, TALL
4	100464-9	4	SEX NUT, 1/4-20
5	100301-1	1	CYLINDER BRACKET, 1" LONG

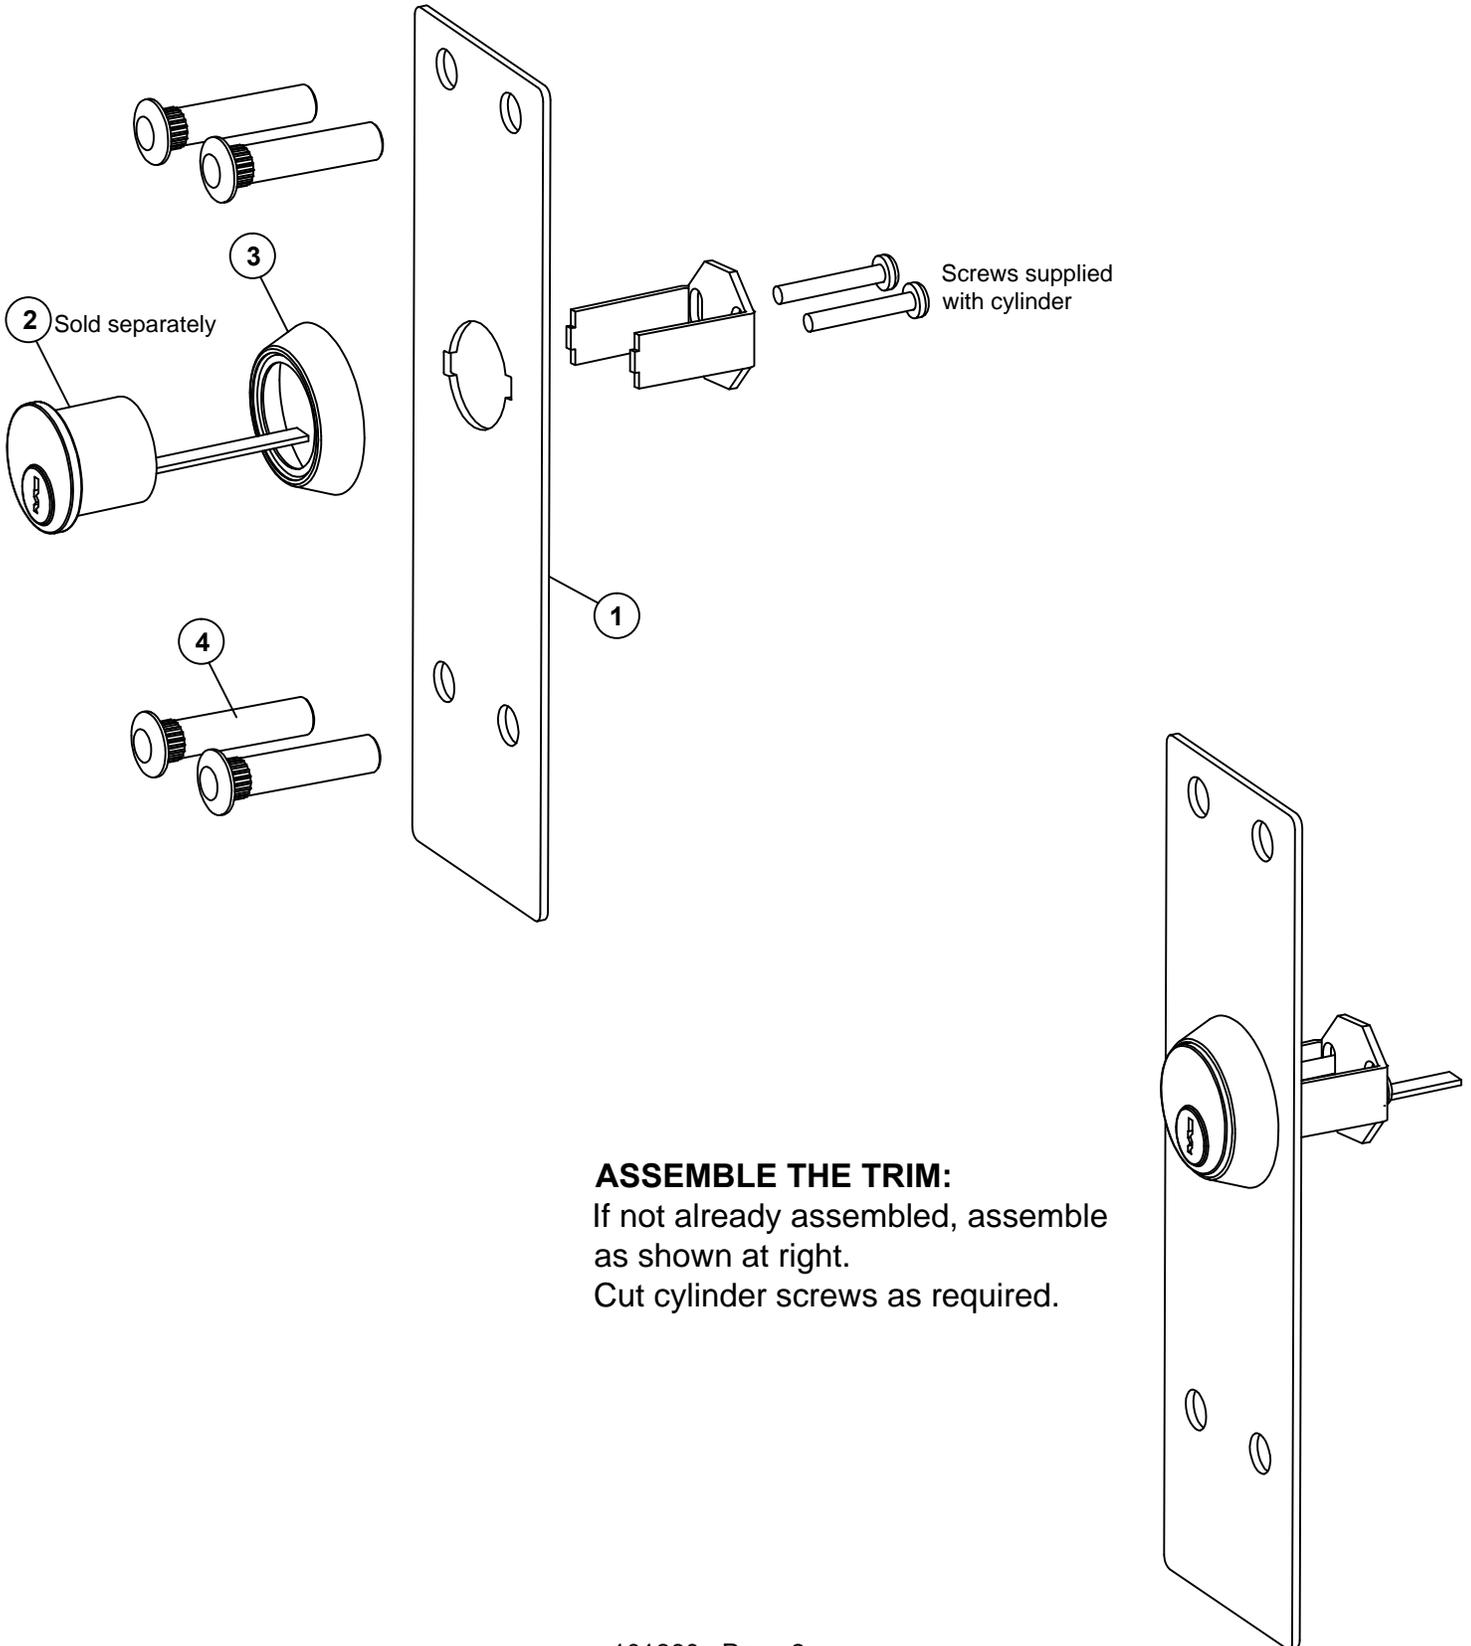



# Door Preparation - Interior Door Face

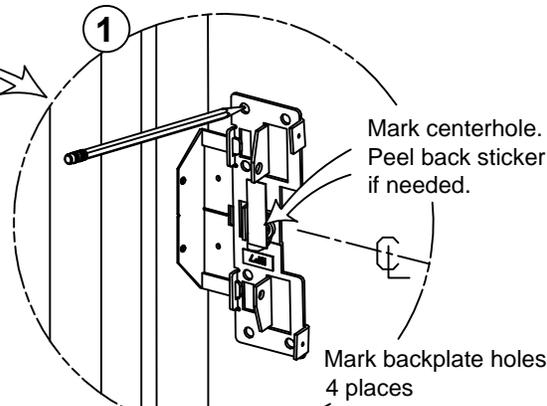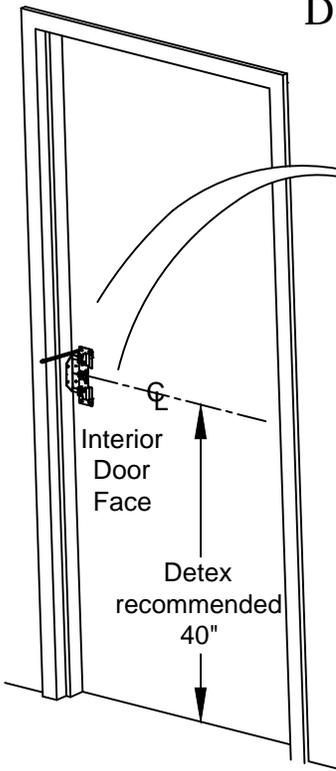

(backplate supplied with exit device)

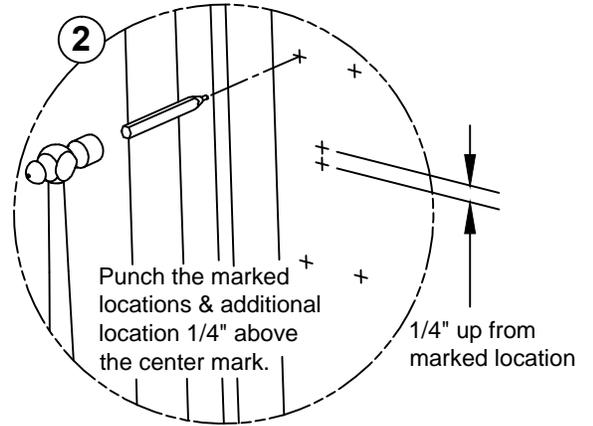



Note: All holes MUST be drilled **STRAIGHT** and **LEVEL**

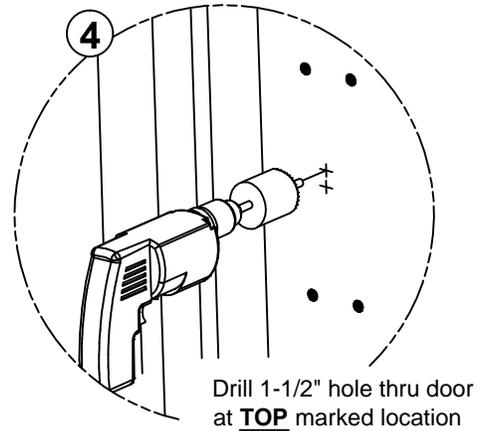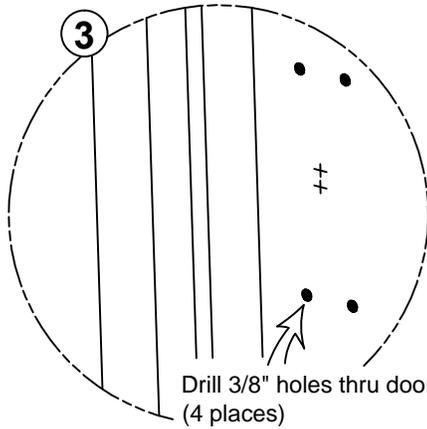


## Mark Cylinder Tailpiece Length

Assemble the trim and backplate to the door, making sure that cylinder tailpiece enters the backplate cam

Mark tailpiece where it sticks thru the cam

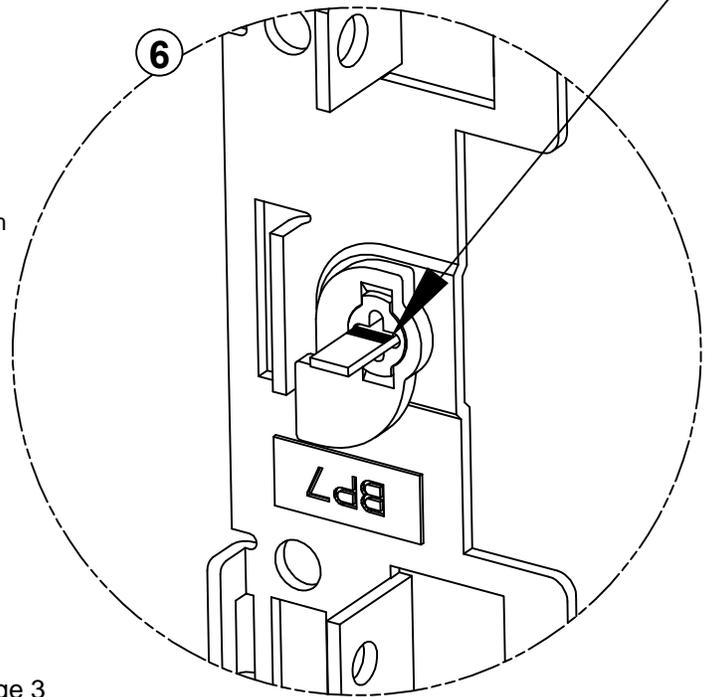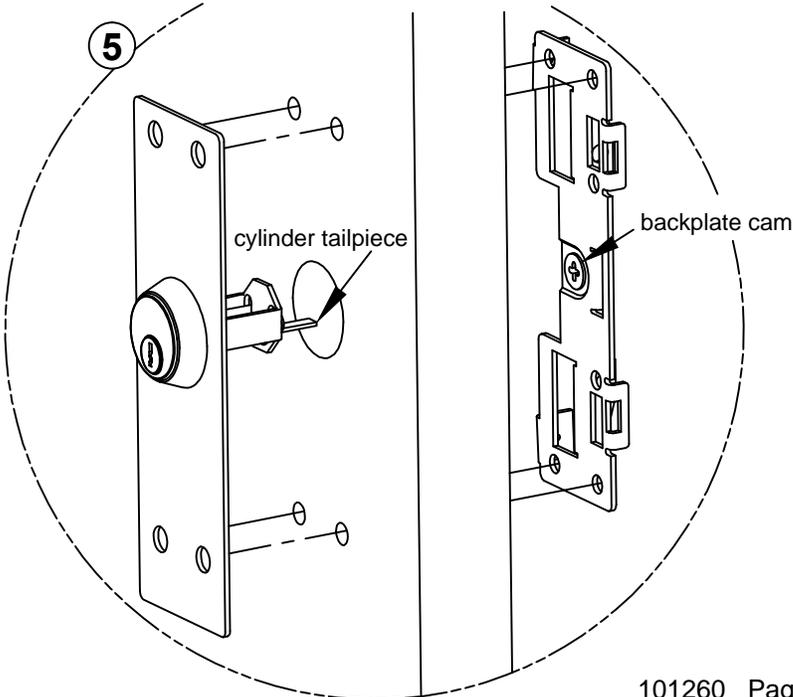

## Trim Cylinder Tailpiece

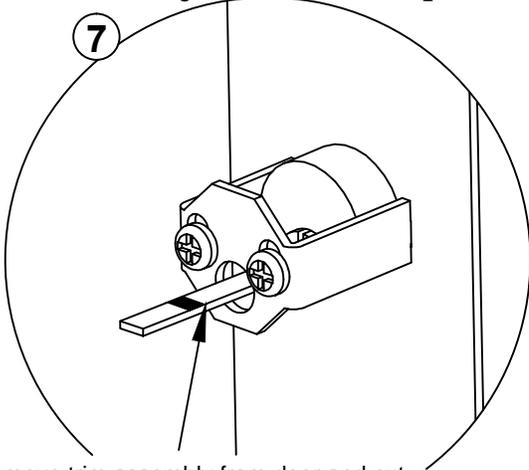


Remove trim assembly from door and cut the tailpiece just inside of the mark.


**Caution: Tailpiece must not extend past the cam.**

## Assemble Trim to Door

### 8 Install sex nuts


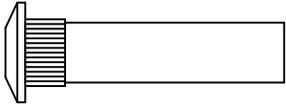


It may be necessary to hammer the sex nuts into the trim plate.

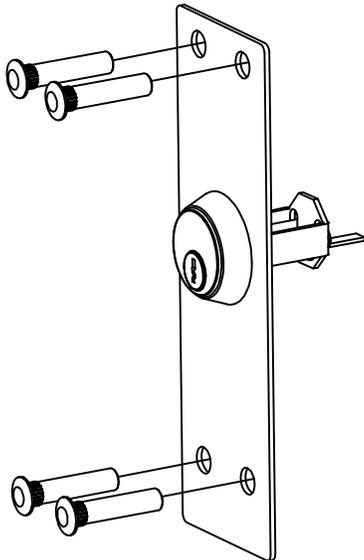

9

With the key out of the cylinder, assemble the trim and backplate to the door, making sure that cylinder tailpiece enters the backplate cam.

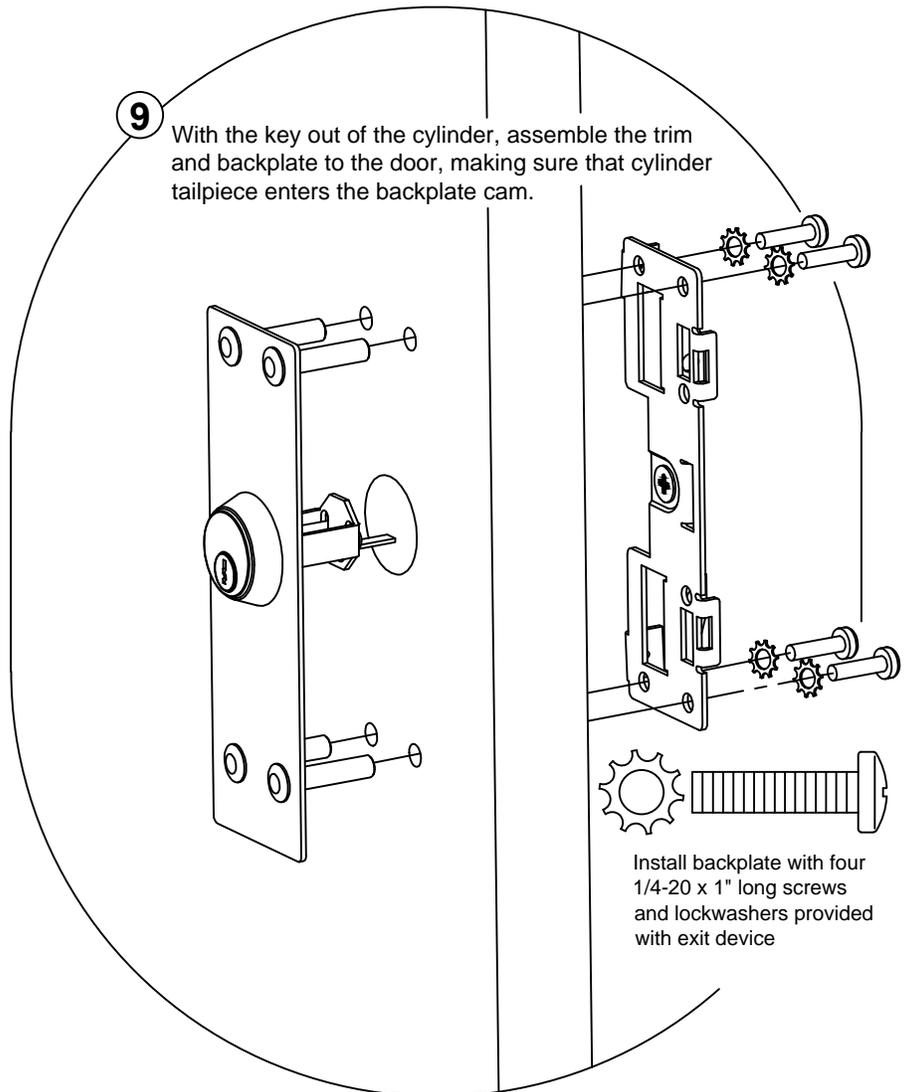

Install backplate with four 1/4-20 x 1" long screws and lockwashers provided with exit device

Key should turn freely in both directions when fully assembled to door.

Resume with panic hardware instruction.