



Detex Corporation, 302 Detex Drive, New Braunfels, Texas 78130-3045
 830-629-2900 / 800-729-3839 / Fax 800-653-3839 / Text photos only: 830-481-6433 / INTERNET: www.detex.com

INSTALLATION INSTRUCTIONS FOR MORTISE 01WM OUTSIDE TRIM

DWG #: 101898


Table of Contents	Page
Device parts breakdown view & part numbers.....	2
Door Prep - Trim Side, Install Trim,.....	3

TOOLS AND SUPPLIES


- Safety Glasses
- (Always put on safety glasses prior to beginning installation of unit)**
- Pencil
- Center Punch
- Hammer
- Drill Motor
- Drill Bits & Taps
- Screw Driver (Phillips Drive)
- Tape Measure

For WARRANTY information,
 scan code below or
 go to www.detex.com/warranty

For device installation videos,
 scan code below or
 go to www.detex.com/videos



ITEM	PART NO.	QTY	DESCRIPTION
1	101911-9	1	TRIM PLATE, 01W, BRUSHED STAINLESS STEEL FINISH (630)
2	100464-9	4	SEX NUT, 1/4-20

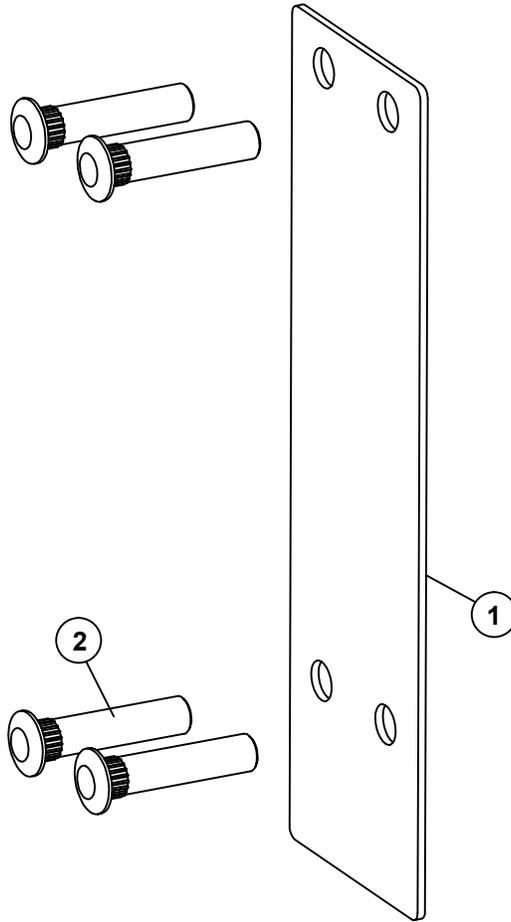


STEP 1: PREP DOOR

MARK & DRILL HOLES - TRIM SIDE:


Use plastic template to mark TRIM holes (LHR shown)

NOTE: The height from the finished floor to the trim/device centerline that Detex recommends is 40".


If unsure of trim/device centerline location, use the method below and at right to determine correct trim location.

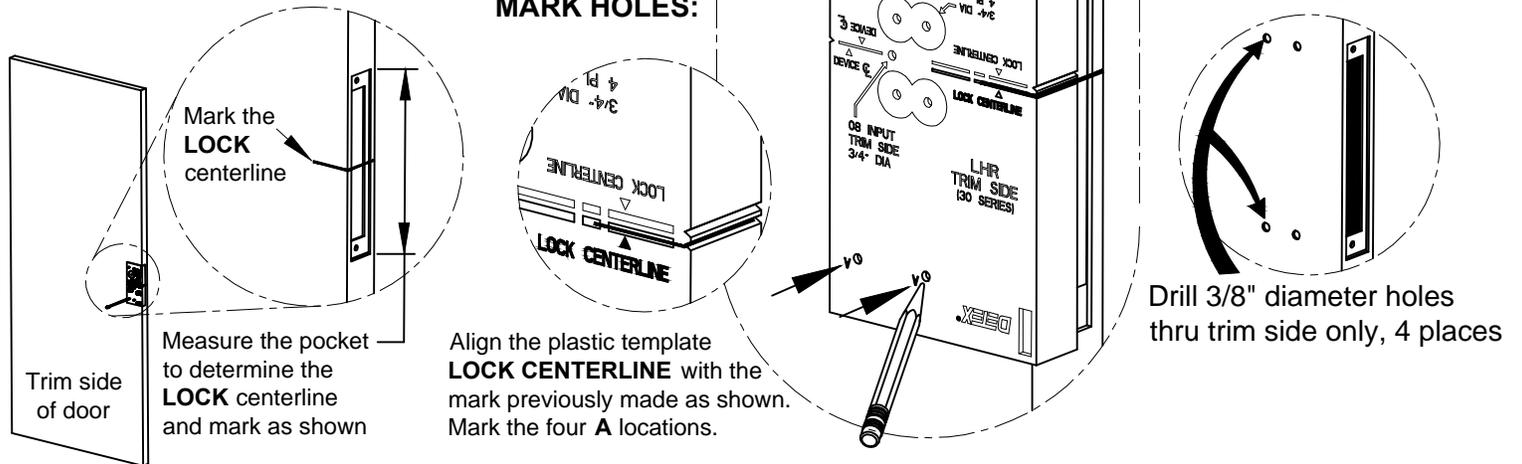

STEP 2: INSTALL TRIM

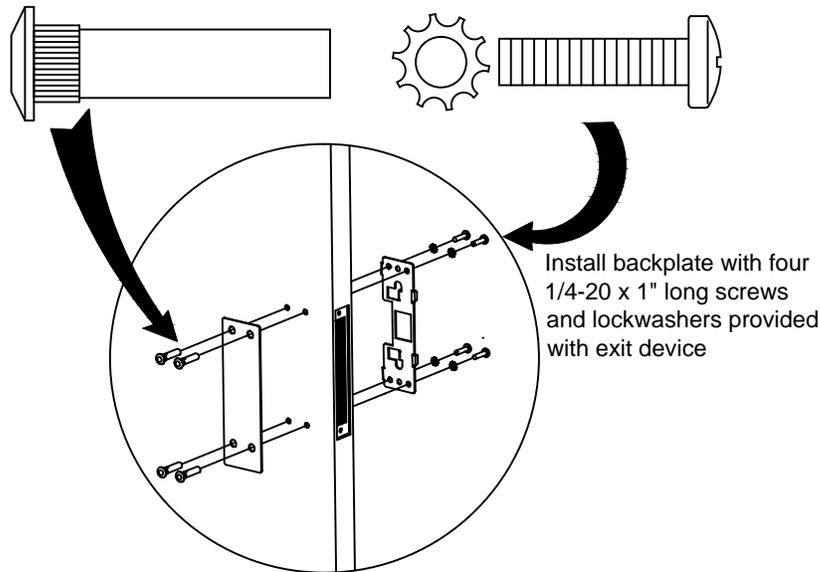

STEP 3: INSTALL MORTISE LOCK

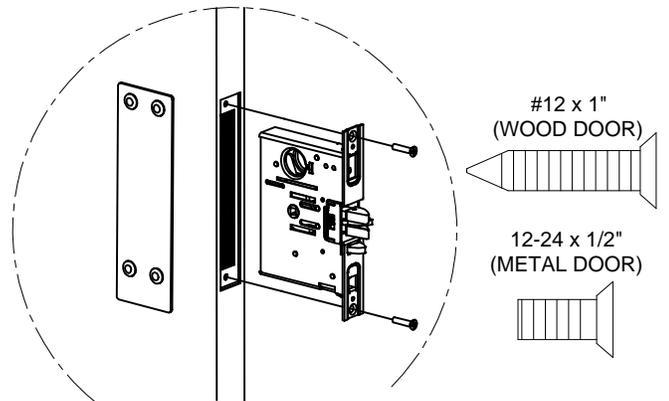

Note: Mortise lock and mounting hardware supplied with exit device. Fasten screws loosely.

TRIM INSTALLATION COMPLETE

Continue installation using device instructions