

AO19 SERIES®

AO19 Activation Accessories Hand-Held Wireless Transmitter

The 104737 Wireless Transmitter provides the most reliable wireless activation of automatic doors available.



Benefits

- The hand-held micro-transmitters are small enough to wear as a necklace, yet have large, easy to activate buttons.
- The transmitter can also be used interchangeably with other Manufacturer's products that operate on its frequencies as well.

Features

- Utilizes Proprietary High Definition Radio Control™ (HDRC™) for unsurpassed signal transmission clarity
- Three user selectable frequencies available in single unit: HDRC™, 300 MHz, 390 MHz.
- FCC license for all three frequencies.
- SignalLock™ guarantees signal transmission when push plate is pressed.
- Power saving circuitry extends battery life.
- Integrated signal radiating antenna boosts signal strength.
- One 104737-1 (CP/TX-HH1) and Two 104737-2 (CP/TX-HH2) buttons available.
- Compact overall size with large activation buttons.
- The 104737 CP/TX can transmit three different frequencies.

Electrical Options

- 104737-1 Hand-held Transmitter - 1 button
- 104737-2 Hand-held Transmitter - 2 button


Accessories

- 104752 Multi-mode Receiver
- 104752-RXM Multi-Mode Receiver

Technical Information

- Temperature Range: -4°F to 140°F (-20°C to 60°C)
- 390 MHz: Compatible with MS SEDCO and GENIE™ products
- Physical Size 2"W x 3/4"D x 2 3/4"H
- 300 MHz: Compatible with Multicode™ products

Dimensions

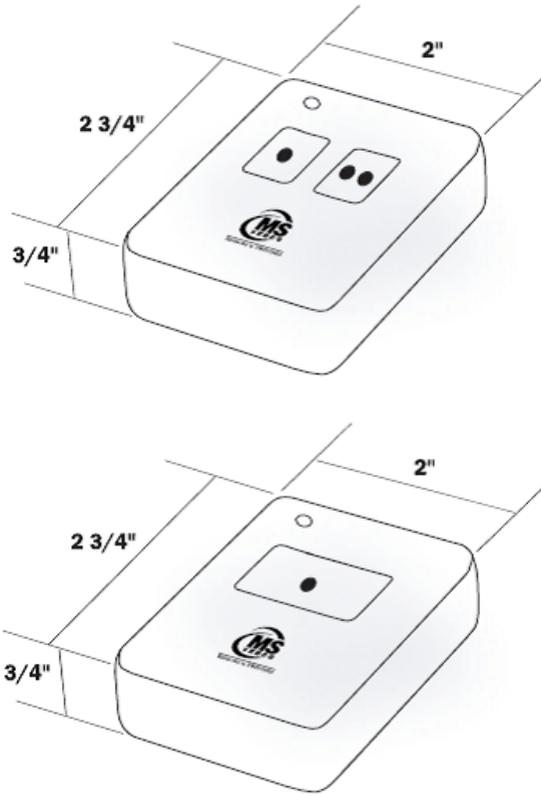

Listings and Approvals



American National Standards Institute (ANSI)



Building Hardware Manufacturers Association (BHMA) - ANSI/BHMA A156.10 & A156.19

FCC

US Patent 7,545,833

Warranty

1 Year Limited Manufacturer's Warranty

DETEX[®]
A Century of Security
1923-2023

Detex Corporation
302 Detex Drive
New Braunfels, Texas 78130-3045 USA
PH. (830) 629-2900
(800) 729-3839
FAX (800) 653-3839
<http://www.detex.com>
USA Sales:
marketing@detex.com
International Sales:
export@detex.com

 Cancer & Reproductive Harm - www.detex.com/prop65