

# EasyKit® DEx10EEX

## Delayed Egress Without Electromagnetic Lock

The DE EasyKits provide a secure system with 15-second delay and 100dB alarm when someone attempts to exit. The DE EasyKit is ideal for retail stores, healthcare, assisted-living facilities, childcare, sports arenas and any location where a special locking delayed exit is required to prevent theft or to protect those trying to exit.



(Shown with 10 Series Rim Exit Device - Available with 10/40 Rim, 30 Mortise and 20/21/50/51 Surface Vertical Rod Devices)

### Benefits

- Best-in-class components provide for fast, easy installation
- All hardware items provided with one easy-to-order, easy-to-specify part number
- Controls foot traffic, deters unauthorized exits, reduces employee and customer theft while providing a life safety, code-compliant application
- Key switch with LED's and horn are mounted on the wall, protecting the electronics from swinging into the weather

### Features

- Configured Delayed Egress EasyKit includes all hardware, instructions, riser illustration and point-to-point wiring diagram
- Factory-programmed, pre-wired delayed egress controller / power supply
- Advantex panic device has stainless steel deadlocking Pullman-type latch bolt
- Remote bypass and signaling options available
- 10 ft. flex conduit loop
- Form C, momentary key switch with green and red LEDs, arms, disarms and resets system
- Code-compliant delayed egress signage
- All hardware is non-handed or reversible
- Fire Alarm override connected at controller / power supply
- Heavy-duty angled end cap deflects damage away from panic device
- Available in various configurations, for single and paired openings
- Easily add various access control options with or without an anti-tailgating option
- System does not require magnetic lock, panic provides delayed exit
- 100dB Alarm

### Mechanical Options

- F - 3-Hour Fire Rated
- H - Hurricane Rated
- CD - Cylinder Dogging
- LD - Less Dogging
- HD - Hex Dogging
- 36 - Fits 36" Door Width (Std.)
- 48 - Fits 48" Door Width
- 99 - Surface Strike
- 98 - Semi Mortise Strike

### Electrical Options

- 1 to 3 second adjustable nuisance alarm
- 120 Volt in/24 Volt out (Std.)
- Also available 277 Volt and 240 Volt

## Accessories

- SN1 – Sex Nut Fasteners
- SSK - Torx Security Screw Kit
- GB - Glass Bead Kits


## Technical Information

- Door Types - Wood, Hollow Metal, Fiberglass or Aluminum
- Minimum Stile - Advantex 10 Series: 4-5/8" with surface strike or 4-1/8" with optional semi-mortise strike
- Minimum Stile - Advantex 40, 50 Series: 2" with standard semi-mortise strike or 2-1/2" with optional surface strike


## Finishes

605 / US3	Polished Brass	612 / US10	Brushed Bronze	629 / US32	Polished Stainless Steel
606 / US4	Brushed Brass	613 / US10B	Oil Rubbed Bronze	630 / US32D	Brushed Stainless Steel
611 / US9	Polished Bronze				

## Dimensions (10 Series Shown)

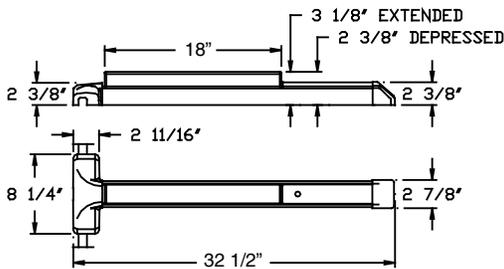

## Riser Diagram

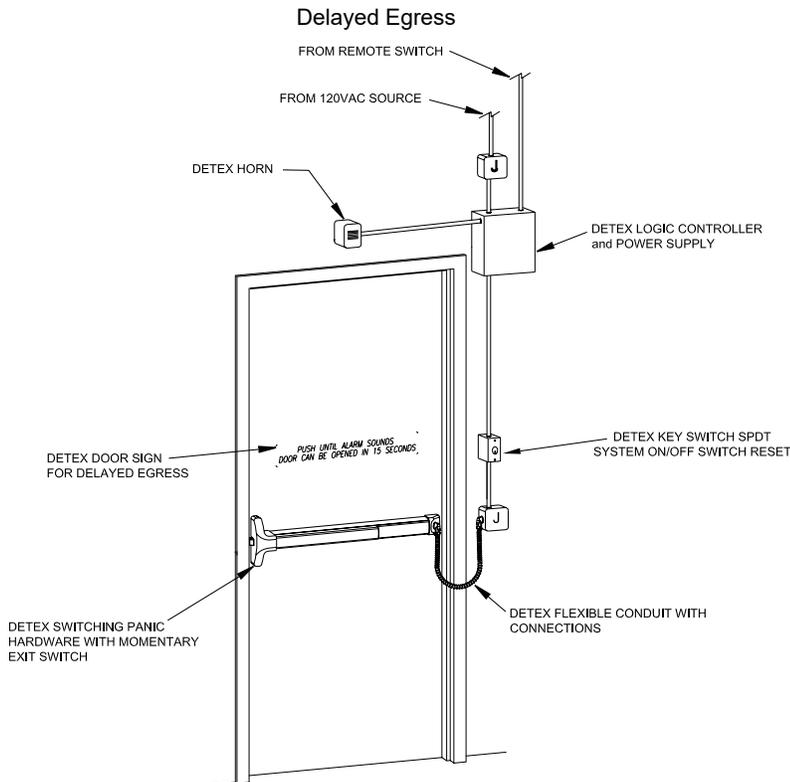

## Listings and Approvals Advantex



UL Listed  
Panic Hardware

UL Listed Fire Exit Hardware for 3 hours, maximum  
4'x10' single doors and pairs of 4'x8' with F90KR key removable Mullion



Meets ADA requirements



UBC 97, Standard 7-2 and  
UL10C for positive pressure



ANSI/BHMA certified A156.3



Meets NFPA 80 & 101  
for Life Safety



Miami-Dade County, Florida  
NOA 10-0303.02 EXP. 04/07/15 } 10/40 Series Only  
State of Florida Approval  
FL9052



California State Fire Marshall -  
4140-0127:105 and  
3725-0127:108

## Detex Limited Warranty

Advantex - 10 Year Mechanical /  
3 Year Electrical Manufacturers  
Limited Warranty

**DETEX**<sup>®</sup>  
*A Century of Security*  
**1923-2023**

Detex Corporation  
302 Detex Drive  
New Braunfels, Texas 78130-3045 USA  
PH. (830) 629-2900  
(800) 729-3839  
FAX (800) 653-3839  
<http://www.detex.com>  
USA Sales:  
[marketing@detex.com](mailto:marketing@detex.com)  
International Sales:  
[export@detex.com](mailto:export@detex.com)



Cancer & Reproductive Harm - [www.detex.com/prop65](http://www.detex.com/prop65)