

MOTION DETECTORS

MN01 & MN02

Passive Infrared Sensors

The MN01 & MN02 provide reliable motion detection for passive "Request-to-Exit" installation. Superior white-light and RFI immunity and SMD circuitry provide outstanding performance and sensitivity.



MN01



MN02

Benefits

- Hands-free activation
- Reliable detection
- Choice of fail safe/fail secure operation
- Easy to install
- Single or double door coverage


Features

- Both offer special circuitry for superior RFI immunity
- Dual-Pyroelectric detection elements
- MN01 allows fail safe/fail secure selection
- MN02 provides fail safe default
- Both offer single or double door coverage


Electrical Options

- MN01 requires 12 to 24VDC or AC
- MN02 requires 10 to 16 VDC
- Form C Relay (Signal pole, double throw)
- Form A Relay (normally open)
- Alarm Output: Normally Closed Solid State, 19VDC @ 100mA max input, 13 ohms resistance type
- Tamper Output: Normally Closed Dry Contact, 30VDC @ 500mA max input (5 watt max)


Detection Area - MN01

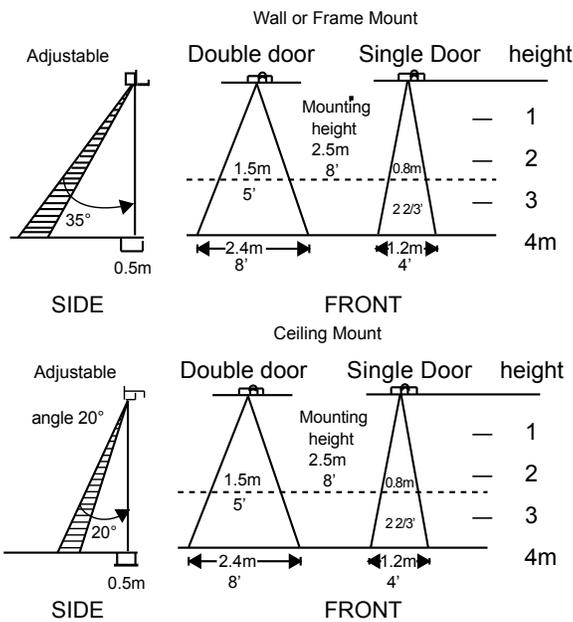


Detection Area - MN02

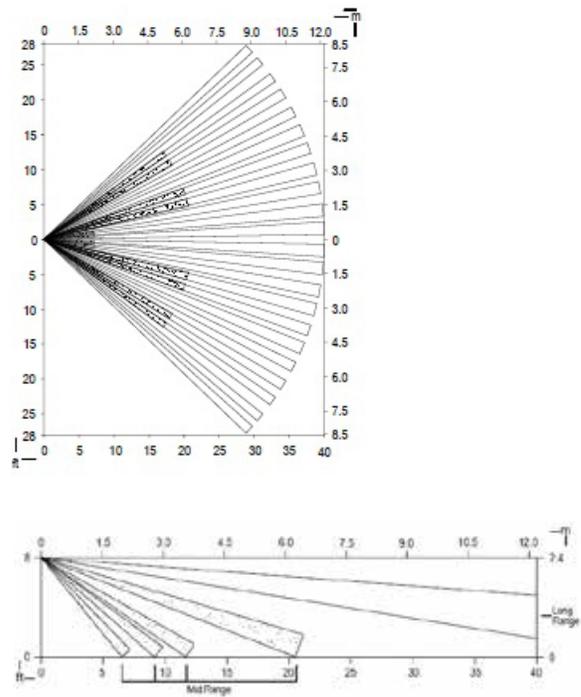

Dimensions - MN01

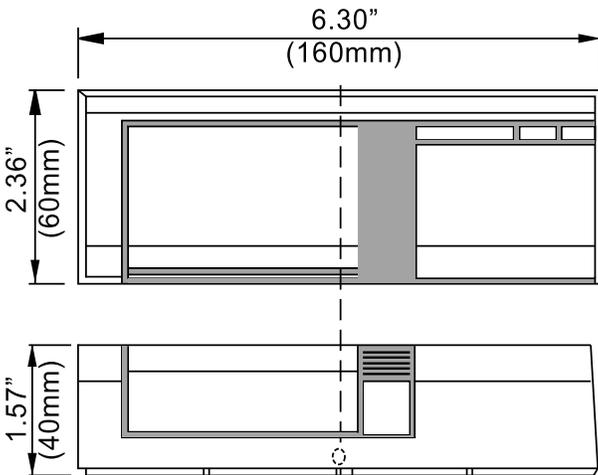

Dimensions - MN02

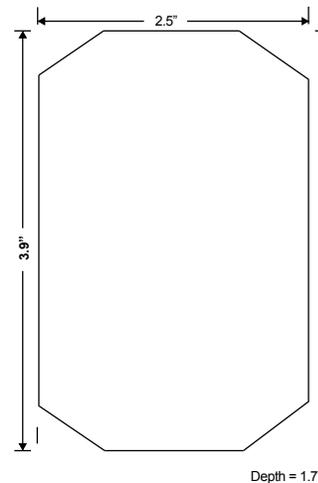

Listings and Approvals



Detex Limited Warranty

1 Year Limited Manufacturer's Warranty

DETEx[®]
A Century of Security
1923-2023

Detex Corporation
302 Detex Drive
New Braunfels, Texas 78130-3045 USA

PH. (830) 629-2900

(800) 729-3839

FAX (800) 653-3839

<http://www.detex.com>

USA Sales:

marketing@detex.com

International Sales:

export@detex.com

⚠ Cancer & Reproductive Harm - www.detex.com/prop65