


DS336 Series

ADA Gate - 36" opening



ADA Gate 36" opening

DS336 Series

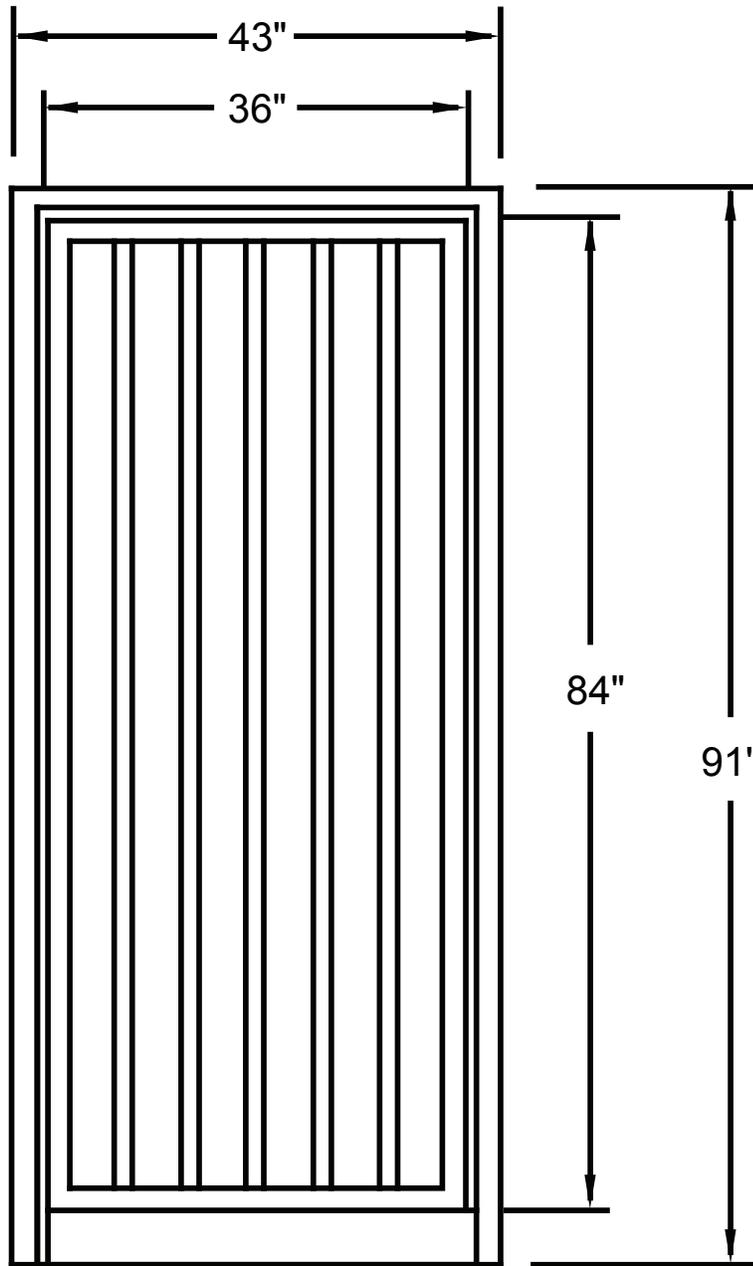

**Measures:****DS336-ADA****Size of Opening (pedestrian clearance)**

DS336-ADA 36" (914mm)

Frames and Door Jam

2" x 3" (51mm x 76.2mm) 11 gauge box tubing

Optional 2" x 2" (51mm x 51mm) 11 gauge box tubing

Exterior Height

91" (2331mm)

Interior Height

88½" (2248mm)

Interior Tubing Sizes**Galvanized or Powder Coated Units**

1½" (38mm) diameter carbon steel 14 gauge

1¾" (44mm) diameter carbon steel 14 gauge

Stainless Steel Units

1½" (38mm) diameter stainless steel 16 gauge

1¾" (44mm) diameter stainless steel 16 gauge

If Panic Bar is required, interior tubing is replaced with ¾" #9 flattened expanded metal mesh (carbon steel or stainless steel)

Options:

- Full exit push-bar, guard and mesh available
- Magnetic lock
- Electric opener (adds 2" of height to gate)
- Push button (wired or wireless)

Product Features:**Materials and Finishes available****in your choice of:**

- Hot dipped galvanized carbon steel
- Polyester enamel on carbon steel (standard color is black. Other colors available upon request)
- Our signature 304 stainless steel/No. 4 satin finish

Design & Construction:

- Designed for secure operation with aesthetics in mind
- Featuring fully welded exterior components
- Minimal exposed hardware
- Heavy gauge materials meeting ASTM standards

Electrical Specifications:

Operating voltage: 24 VDC

All electrical components are UL recognized and CSA certified.

Standards and Codes:

Austenitic stainless steel:
ASTM A240, A249, A276

Hot rolled steel:
AISI C-1020, AISI C-1018

Hot dipped galvanizing:
ASTM A-143, ASTM A-153-80

Stainless steel fasteners:
ASTM A-320

American Welding Society (AWS)
Standard D1.1

Matching Full-Height Turnstiles available in Single (DS427-S, DS430-S, DS439-S, DS448-S) and Tandem (DS427-T and DS430-T) Designs