


DSRD70 Series

Aluminum turnstile with revolving door



Aluminum turnstile with revolving door DSRD70 Series

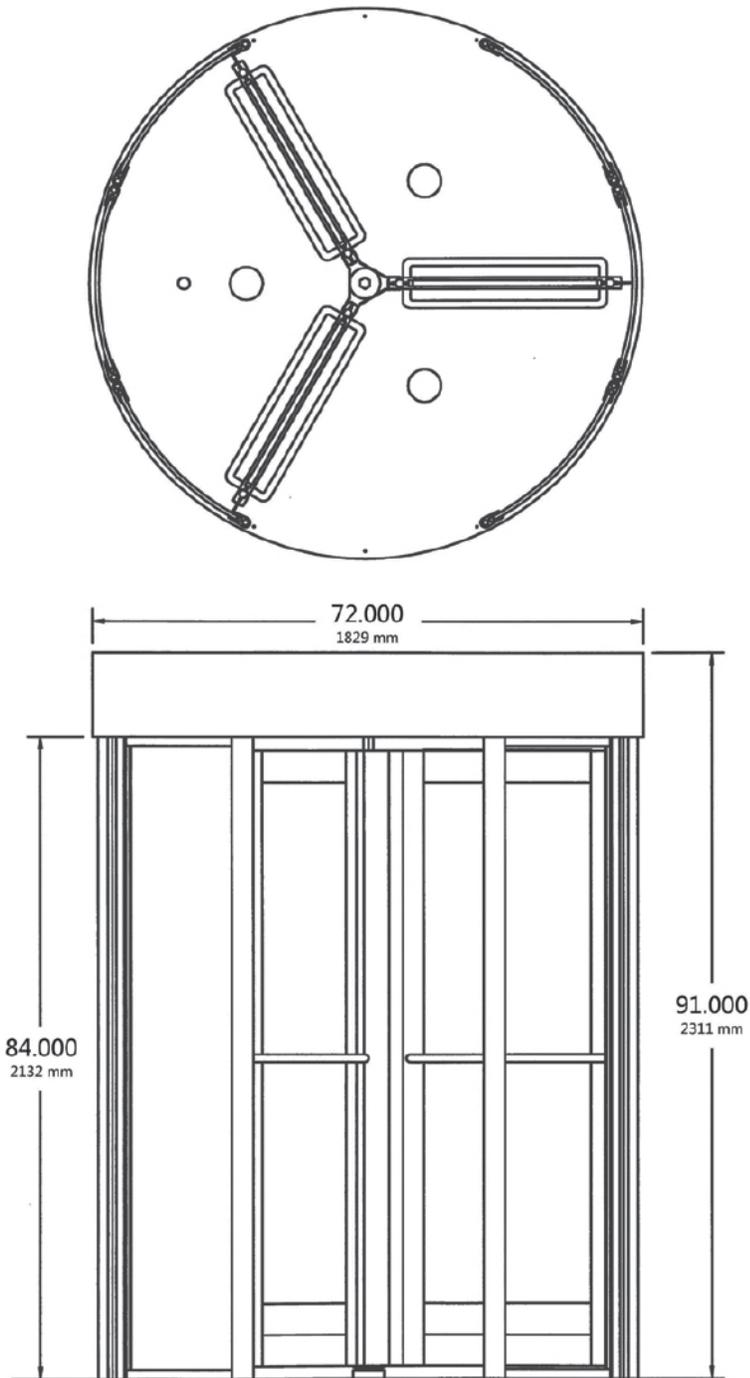

Dimensions are approximate.



Measures:

Exterior Height: 91”
Interior Height: 84”
Diameter: 72”
Pedestrian Clearance: 30”

Options:

- Card reader mounting plates
- Daylight visible indicator lights
- 8 digit key resettable LCD counter with seven year lithium battery
- Metal detection portal
- Additional options available upon request

Product Features:

**Materials and Finishes available
in your choice of:**

- Standard anodized finish choices are clear and bronze. Other colors available upon request.

Construction:

Materials:

Various 6061 & 6063 extruded aluminum
3/16” MR10 Lexan® polycarbonate
1/4” clear tempered glass
7 & 11 gauge steel (mainframe/canopy)
Anodized aluminum sheet, canopy wrap

Assembly and Hardware:

- All exposed fasteners stainless steel
- Canopy & outer cage panels secured to concrete with 3/4” threaded rods, epoxied into concrete
- Rotor pivots on a sealed load runner bearing, secured with stainless steel coupling anchored onto concrete
- Outer cage panels pre-assembled with concealed spring pins and solid rods
- Door panels and cosmetic covers secured with flat head screws

Electrical Specifications:

Input voltage: 100-240 VAC
Input current: 1.3 - .55 A
Frequency: 50/60 Hz

Storage Temperature: -40 to 158°F
Operating Temperature: -4 to 131°F
(cold weather package available)

Operating voltage: 24VDC
Operating current: 1.2 A (typical)